SPECIFICATIONS:
GAS INPUT: 150,000 BTU NG ☐ LP ☐
GAS LINE CONNECTION: 1/2 NPT LEFT ☐ RIGHT ☐
GAS CONTROL: HONEYWELL SMART VALVE
CONTROLER: MONTIGO CV80
POWER SUPPLY: 110 VOLTS 15 AMP
POWER VENT:
RS14 ☐ RS16 ☐ RSIF16 ☐ RSIF18 ☐ CUSTOM ☐
BURNER STYLE:

 ☐  ☐

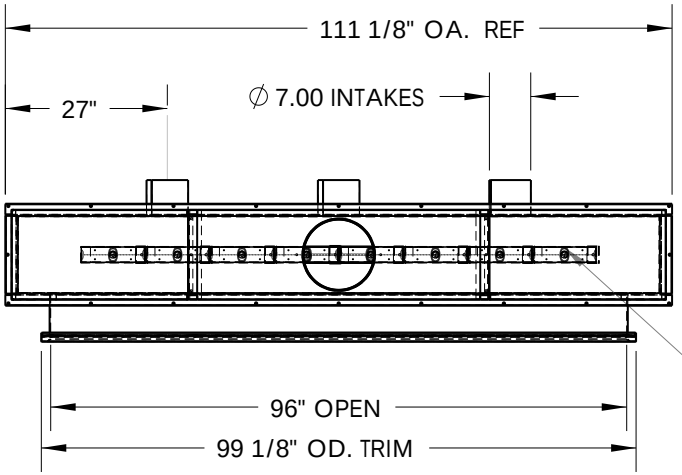



DETAIL A
SCALE 1 : 16

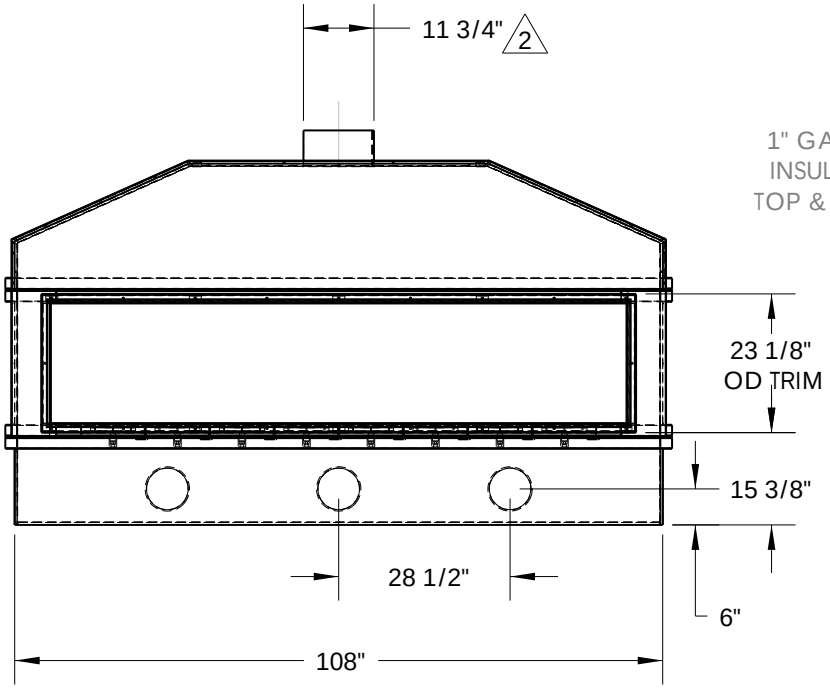

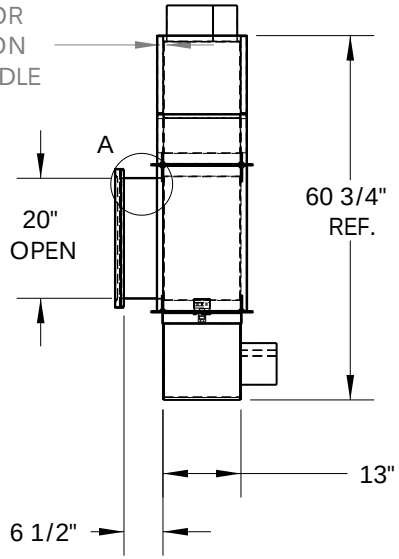

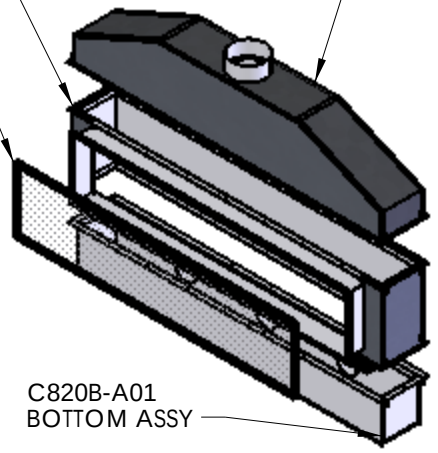

Approval:_____ **Date:**_____
In signing this, I certify that the specifications of this drawing meet my order standards

REV.	DESCRIPTION	DATE	APPROVED
2	exhaust collar was 11.9375 od	6/28/2006	

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL ± 1/32"
TWO PLACE DECIMAL ± .015"
THREE PLACE DECIMAL ± .005"
ALL BENDS ARE ASSUMED TO BE 90° UNLESS NOTED OTHERWISE.

	NAME	DATE
DRAWN	WJK	06/05/2006
CHECKED		
MATERIAL		
FINISH		

OVER ALL ASSY
STANDARD C820

Canadian Heating Products

SIZE A | DWG. NO. C820-A01 | REV. 2
SCALE:1:32 | WEIGHT: | SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CANADIAN HEATING PRODUCTS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CANADIAN HEATING PRODUCTS IS PROHIBITED.

Default
Wednesday, July 05, 2006 8:47:43 AM
Z:\CADD\SEE-FIRE\STANDARD\C820\C820-A01