



SPEC SHEET  
**PRODIGY**  
 PC3 & PC3ST

**MONTIGO**®

**LINEAR GAS FIREPLACE**

**DIMENSIONS**

PART	ACTUAL	FRAMING
FRONT WIDTH	40¼"	42¼"
BACK WIDTH	40¼"	42¼"
HEIGHT	23¼"*	26 ¾/16"
DEPTH	19½"	18½"
VIEWING AREA	36" X H"	N/A

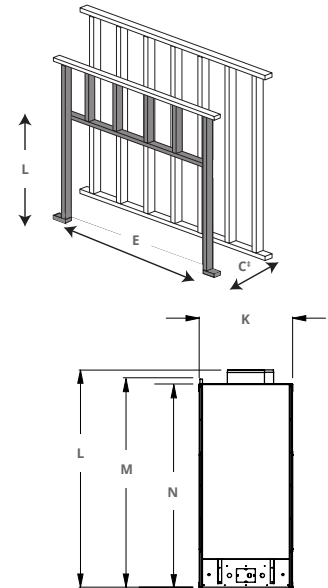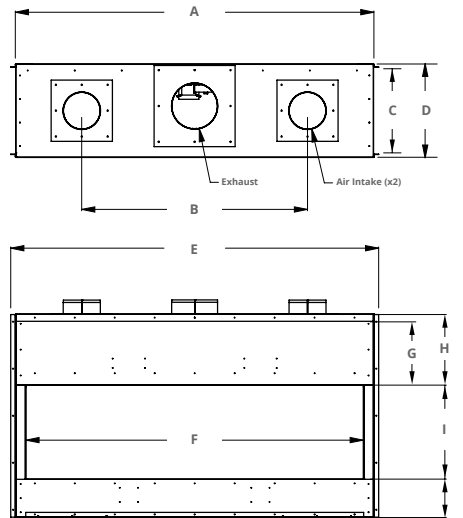

**FEATURES**

- COOL-Pack system allows for all glass barriers, no screens required
- Zero clearance
- Multi-color LED lighting
- Up to 15,000 BTU/H per linear foot
- Customizable media options
- Electronic ignition
- Compatible with home automation systems

	AIR INTAKE	EXHAUST	A	B	C	D	E	F	G	H	I
3'	2x6"	8"	40¼"	24"	18½"	19½"	42¼"	36"	15½"	16½"	12", 20", 30", 36", 60"
4'	2x8"	10"	52¼"	32"			54¼"	48"			
5'			64¼"	40"			66¼"	60"			
6'			76¼"	48"			78¼"	72"			
7'	2x10"	12"	88¼"	56"	90¼"	84"					
8'			100¼"	60"	102¼"	96"					

	J	K	L	M	N
3'	8½"	19½"	26 ¾/16" + Glass Height	24¼" + Glass Height	23¼" + Glass Height
4'					
5'					
6'					
7'					
8'					

\*If the framing must be built in advance, the opening for the fireplace should be increased by 5" in each direction so that the fireplace can be maneuvered into position

Single sided framing layout shown, see install manual for see-through layout, same dimensions still apply.

**TECHNICAL SPECIFICATIONS**

**Prodigy units Come standard with:**

- Ebony firestones or Star Ice fireglass
- Intake and exhaust air dampers
- 50' control and damper control cable
- Multi-color LED lighting

**Prodigy options:**

- Designer speckled stones, driftwood, firestones, or fireglass
- Indoor-Outdoor seal kit for see through units
- Reflective glass panels
- Multiple power vent options
- Passive or powered COOL-Pack glass system