




All post purge control systems are sensitive to electrical interferences and will not turn off when connected to any other solid state control device such as a wireless remote system.

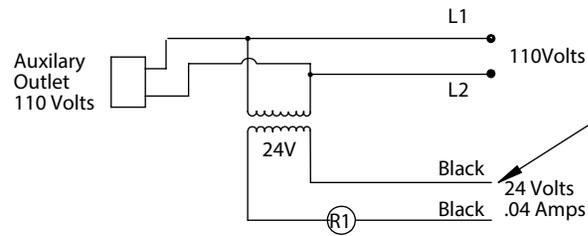

Connect the two black wires to a Lutron/ wireless remote control or any other switch. The two black wire will control a 24 Volt relay. Specifications: 24 Volts AC current is 4 milli Amps



Connect the two white wires to a milli volt valve, a SIT electronic Ignition system or a post purge control system for a power vent module instead of the wall switch.

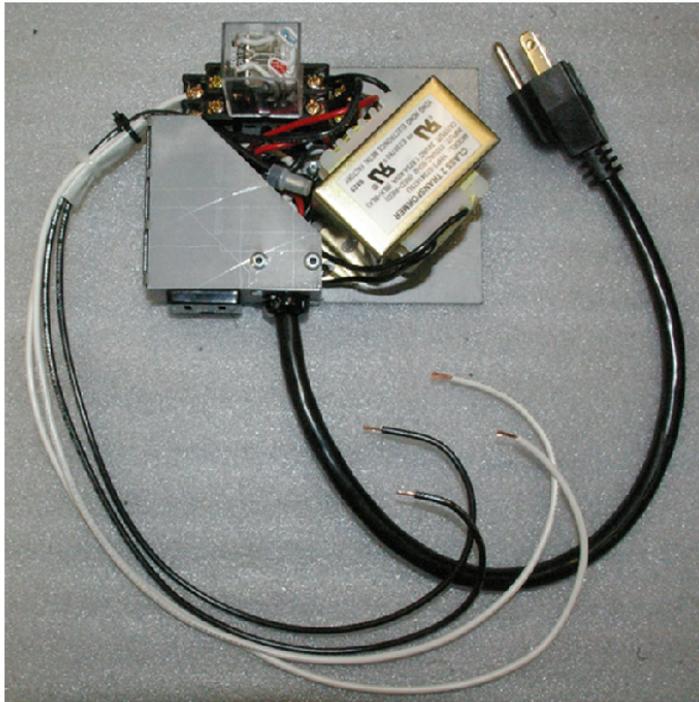

Home Automation Fireplace Control		MONTIGO®	
NAME	DATE	SIZE	DWG. NO.
DRAWN BY	6/7/2010	A	
CHECKED BY		SCALE	1:3.5
MATERIAL		WEIGHT:	
FINISH			SHEET 2 OF 2

DIMENSIONS ARE IN INCHES
 TOLERANCES:
 FRACTIONAL ± 1/32"
 TWO PLACE DECIMAL ± .015"
 THREE PLACE DECIMAL ± .005"
 ALL BENDS ARE ASSUMED TO BE 90 ° UNLESS NOTED OTHERWISE.

PROPRIETARY AND CONFIDENTIAL