



Features

Convertible to top or rear flue vent

Hi-Lo control to adjust flame level

DIVINE
SINGLE SIDED

SPECIFICATIONS AND FEATURES

H42, HL42,
HW42 Wildfire

Single sided
Direct vent

QUICK DIMENSIONS

H*42	UNIT FRAM.	
F.WIDTH	43 ³ / ₈	42
B.WIDTH	28 ³ / ₈	42
HEIGHT	41 ¹ / ₈	46 ¹ / ₂
DEPTH	20 ³ / ₈	21 ³ / ₈
VIEWING	39 ¹ / ₂ x 28 ³ / ₈	

H42
TRADITIONAL

Standard

Traditional burner and logset

Options

Various traditional liners

River rock kit [NG only]

Fans with speed control

Surrounds in satin black or stainless steel

Full function remote control for flame modulation

HL42
CONTEMPORARY

Standard

Contemporary burner with Sage firebeads

Options

Speckled stones, firestones, firebeads or fireglass

Fans with speed control

Surrounds in satin black or stainless steel

Full function remote control for flame modulation

HW42-2 DELUXE
WILDFIRE

Standard

Wrought iron grate

Herringbone brick with designer logset

Full function remote control for flame modulation

Options

Fans with speed control

Black glass liner

Surrounds in satin black or stainless steel

BTU LISTING

H42DFN* / 34,000
H42DFL* / 32,000
HL42DFNI / 34,000

HL42DFLI / 32,000
HW42DFNI-2 / 34,000

EFFICIENCY

H42DFN / FE 59
H42DFL / FE 59

H42DFLI / FE 60.6
H42DFNI / FE 60.6





H42 / STAINLESS SURROUND



HL42 / SATIN BLACK SURROUND



H42 DIMENSIONS

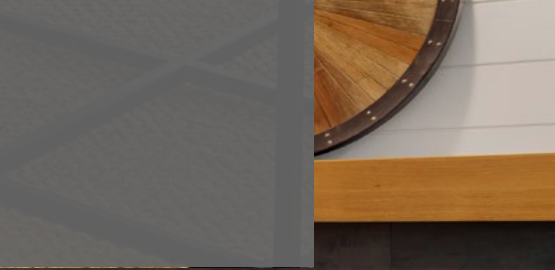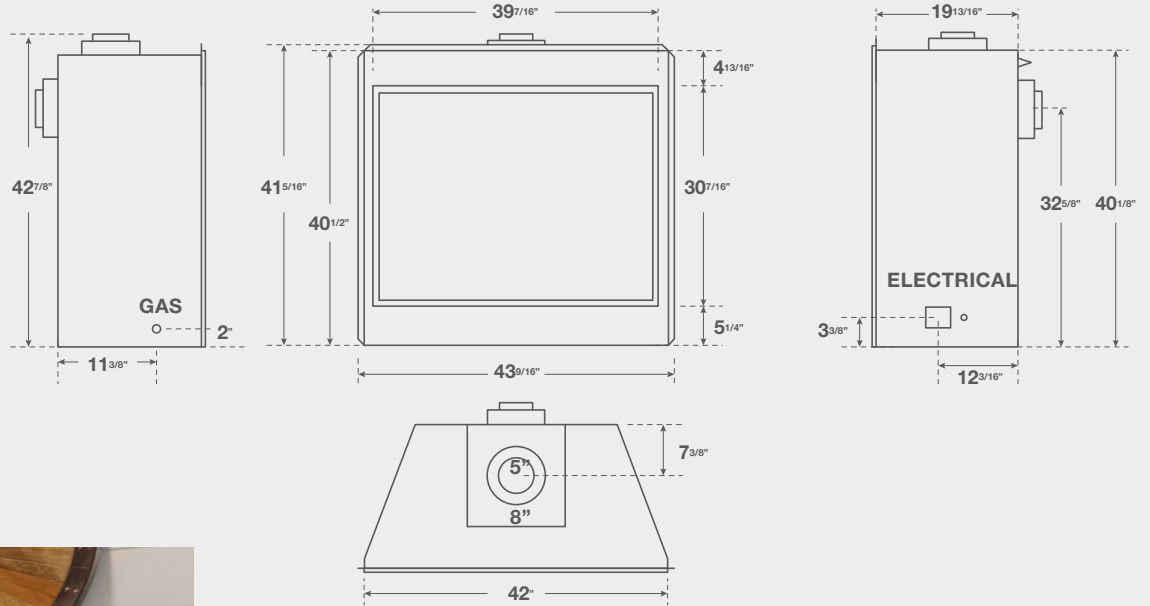

MONTIGO / DIVINE / HL38 / RIVER ROCK KIT

MONTIGO / DIVINE / HW38 / TRADITIONAL LOGSET



OPTIONS & FEATURES

REMOTE^Δ
RX200**

WALL REMOTE
REC1493

IRON GRATE^{†Δ}
HWIG42

RIVER ROCK[†]
RBHR42R

[†]Optional for H42 only
^ΔStandard on HW42DF[†]-1-2



LINERS

HERRING BONE^{†Δ}
HBK42H

COLONIAL[†]
HBK42C

HERITAGE[†]
HBK42R

BLACK GLASS
RGPH42



Unit Specifications

Icon Legend

AVAILABLE +

NOT AVAILABLE -

DEDICATED ◊

STANDARD ○

	BTU Natural Gas	BTU Liquid Propane	Venting	Clearance Top - Rear vent	Clearance Top - Top vent	Clearance Sides	Clearance Back	Clearance Floor	Front viewing area	Front glass type	Standard media	Invisimesh screen	Powervent	Remote control	Fans	Uplighting	Downlighting
H34DF*	18,000	18,000	4"/7"	9	17½	1	2	0	31⅜x22¾	Tempered	Traditional	○	+	○	○	-	-
HLB34DF*	18,000	18,000	4"/7"	11	17½	1	2	0	31⅜x22¾	Tempered	HW1082	○	+	+	+	-	-
HLB34DF*-2	18,000	18,000	4"/7"	11	17½	1	2	0	31⅜x22¾	Tempered	Speckled	○	+	○	○	-	-
H38DF*	26,000	26,000	5"/8"	9	17½	1	2	0	35¼x26¾	Tempered	Traditional	○	+	+	+	-	-
HL38DF	26,000	26,000	5"/8"	9	17½	1	2	0	35¼x26¾	Tempered	HW1082	○	+	+	+	-	-
HW38DF	34,000	30,000	5"/8"	9	17½	1	3	0	35¼x26¾	Neoceramic	Wildfire	○	+	○	+	-	-
H42DF*	34,000	32,000	5"/8"	9	17½	1	1	0	39⅞x30⅞	Tempered	Traditional	○	+	+	+	-	-
HL42DF	34,000	32,000	5"/8"	9	17½	1	1	0	39⅞x30⅞	Tempered	HW1082	○	+	+	+	-	-
HW42DF	34,000	32,000	5"/8"	9	17½	1	1	0	39⅞x30⅞	Tempered	Wildfire	○	+	○	+	-	-
H36PV	55,000	N/A	5"/8"	9	17½	1	1	0	38½x31½	Tempered	Traditional	○	◊	+	-	-	-

DIVINE FRAMING

	A	B	C	D	E	F
H34	39	20	33⅞	40	56¼	0
H36	50	24	46	61¼	81	1
H38	42	21⅞	33⅞	43⅞	62	0
H42	46½	21⅞	42	48⅞	68	0

See instruction manual for detailed instructions

Header on edge not required if framing meets clearance to venting

FRAMING DIMENSIONS

