

Features

Meets requirements for efficiency rebates

14¼ framing depth

Mobile home compatible

Convertible to co-linear venting

DELRAY / FROM MINIMALIST TO INDULGENCE

DELRAY
LINEAR

ELEGANTLY SIMPLE

DRL3613
DRL4813

SINGLE SIDED
DIRECT VENT

QUICK DIMENSIONS

	DRL3613		DRL4813	
	UNIT	FRAM.	UNIT	FRAM.
F.WIDTH	45¼	43¾	57¼	55¾
B.WIDTH	41¾	43¾	53⅞	55¾
HEIGHT	26¾	33⅞	26¾	33⅞
DEPTH	12¾	14¼	12¾	14¼
VIEWING	36½ × 14⅞		48½ × 14⅞	

DELRAY FULL LOAD
LINEAR

Standard

Concealed burner with ice fireglass

Multi-function remote control

Remote controlled fans

Low-Vis safety screen

Black reflective glass

Halogen downlighting

Battery backup

Cement board

Options

Propane conversion kit

Adjustable trim kits

Speckled stones, driftwood, glass media

Heat management

DELRAY BASIC
LINEAR

Standard

Concealed burner with ice fireglass

Cement board

Options

Remote control

Fans

Low-Vis safety screen

Black reflective glass

Propane conversion kit

Adjustable trim kits

Battery backup

Speckled stones, driftwood, glass media

Heat management



BTU LISTING

DRL3613NI / 16,000
DRL4813NI / 21,000
DRL3613LI / 16,000
DRL4813LI / 19,000

DRL3613NI-2 / 16,000
DRL4813NI-2 / 21,000
DRL3613LI-2 / 16,000
DRL4813LI-2 / 19,000

EFFICIENCY

DRL3613NI / 71% P.4. 1-15
DRL4813NI / 63% P.4. 1-15
DRL3613LI / 71% P.4. 1-15
DRL4813LI / 60% P.4. 1-15


DRL3613NI-2 / 71% P.4. 1-15
DRL4813NI-2 / 63% P.4. 1-15
DRL3613LI-2 / 71% P.4. 1-15
DRL4813LI-2 / 60% P.4. 1-15





MONTIGO / DELRAY / LINEAR / DRL3613NI-2 / DRIFTWOOD SPECKLED STONES

DELRAY DIMENSIONS

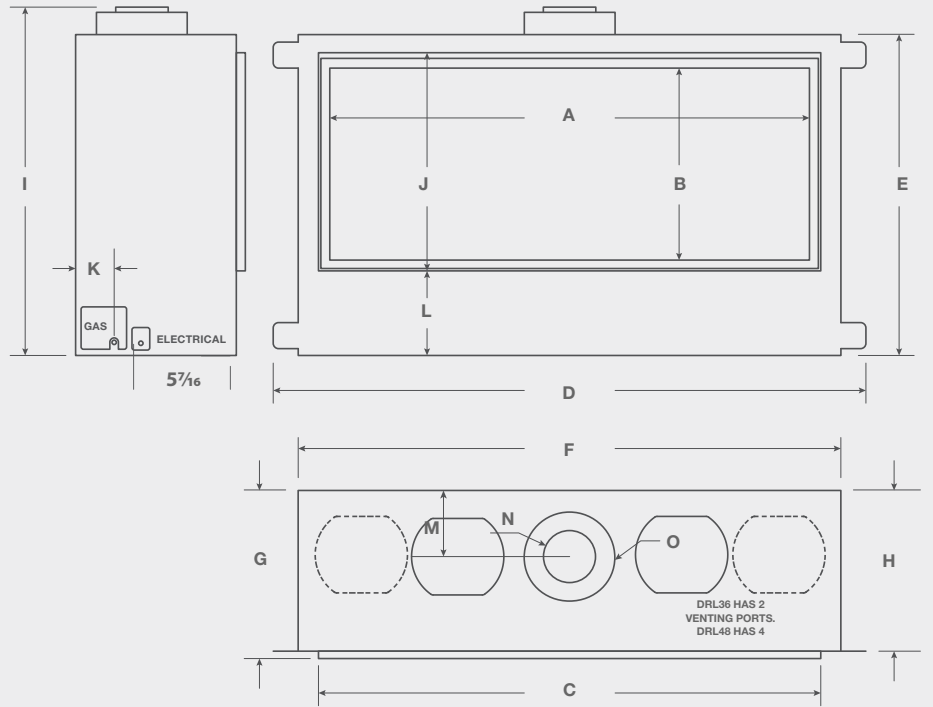

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
DRL36	36½	14⅛	38¾	45¼	24¼	41¾	12¾	12⅝	26¾	16⅝	3⅝	6⅞	5	4	7
DRL48	48½	14⅛	50⅞	57¼	24½	53⅞	12¾	12⅝	26¾	16⅝	3⅝	6⅞	5	4	7



MONTIGO / DELRAY / LINEAR / DRL3613NI-2 / ICE FIREGLASS

OPTIONS & FEATURES



REMOTE†
RX200**



WALL REMOTE
REC1493



BLACK GLASS†
RBGDRL**



DOWNLIGHTING†



TRIM KIT
DRLT**-*

†Standard for full load units

Unit Specifications

ICON LEGEND		
AVAILABLE	+	NOT AVAILABLE -
DEDICATED	◊	STANDARD ◦

	BTU NATURAL GAS	BTU LIQUID PROPANE	VENTING	CLEARANCE TOP	CLEARANCE SIDES	CLEARANCE BACK	CLEARANCE FLOOR	FRONT VIEWING AREA	FRONT GLASS TYPE	STANDARD MEDIA	LOW-VIS SAFETY SCREEN	POWERVENT	REMOTE CONTROL	FANS	UPLIGHTING	DOWNLIGHTING
DRL3613*I-2	16,000	16,000	4"/7"	21	1	2	0	36½ X 14½ ¹¹ / ₁₆	TEMPERED	HW1157	◦	+	◦	◦	-	◦
DRL3613*I	16,000	16,000	4"/7"	21	1	2	0	36½ X 14½ ¹¹ / ₁₆	TEMPERED	HW1157	+	+	+	-	-	-
DRL4813*I-2	21,000	19,000	4"/7"	21	1	2	0	48½ X 14½ ¹¹ / ₁₆	TEMPERED	HW1157	◦	+	◦	◦	-	◦
DRL4813*I	21,000	19,000	4"/7"	21	1	2	0	48½ X 14½ ¹¹ / ₁₆	TEMPERED	HW1157	+	+	+	-	-	-

DELRAY LINEAR FRAMING

	A	B	C	D	E	F
DRL3613	33 ¹¹ / ₁₆	14¼	43¾	47½	67½	½
DRL4813	33 ¹¹ / ₁₆	14¼	55¾	56½	79¼	½

Header must be on edge to meet clearance to venting

