


Installation Instruction



Power Vent
Restrictor

Adjustable 5"
PVAFR02




⚠ DANGER

Read and understand this manual. Improper installation, adjustment, alteration, service or maintenance can cause serious injury, property damage or even death. For assistance or additional information consult a qualified installer, service agency or the gas supplier.

XW2002

The PVAFR02 adjustable flue restrictor is for use on any Montigo fireplace equipped with a Montigo Power Vent with 5"/ 8" pipe.

This is NOT intended for use with Montigo direct vent applications. For direct vent systems please contact you nearest Montigo Dealer for options.



NOTICE

Installer: Leave this manual with the appliance. Do not remove.
Consumer: Retain this manual for maintenance and future reference. Do not Discard.

XW2012



Installation

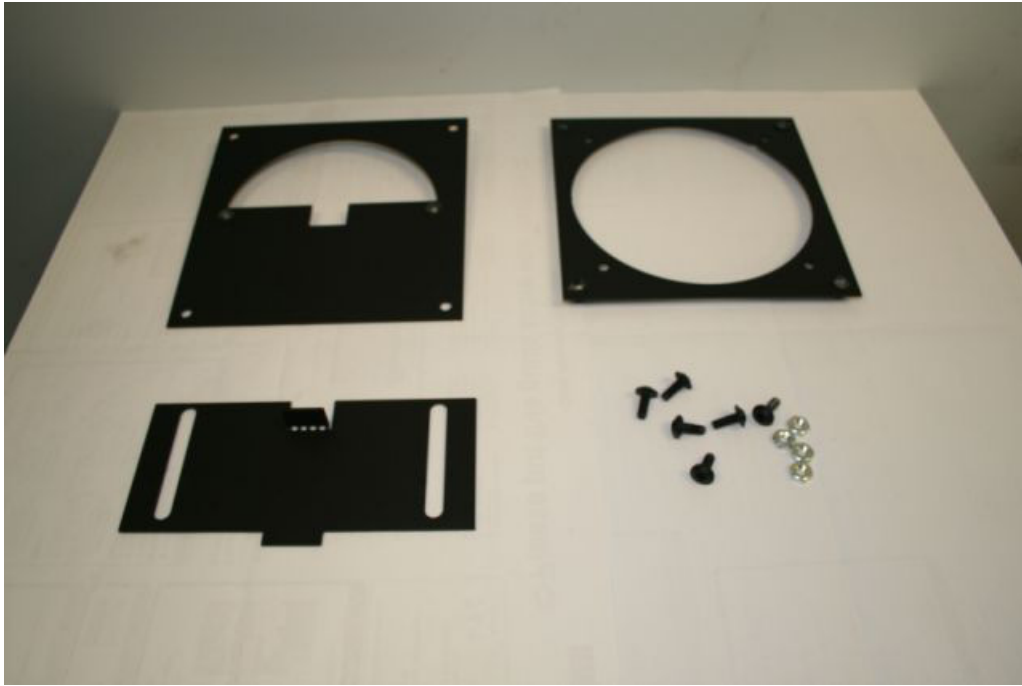


Figure 1. Flue Damper Components

STEP 1: Ensure that you have all of the required components. (See fig. 1)

STEP 2: Remove or disconnect PVFCB, Power Vent Fan Control Box, if it was previously installed.

STEP 3: Install Base Plate, over the existing 5" flue opening (TOP or REAR) whichever is being used.

STEP 4: Install Flue Diffuser Plate and Adjustable Shunt over the base plate.

STEP 5: Slide Adjustable Shunt further closed until desired flame pattern is achieved. The flame pattern will alter after the fireplace heats up.

STEP 6: Allow flame to burn for 2 hours, allow unit to cool and readjust shunt as required.

