


FOR YOUR SAFETY - READ BEFORE LIGHTING:

WARNING: If you do not follow these instructions exactly, a fire or explosion may result causing property damage, personal injury or loss of life.

- A. This appliance does not have a pilot. It is equipped with an ignition device which automatically lights the burner. Do not attempt to light the burner by hand.
- B. BEFORE OPERATING smell all around the appliance area for gas. Be sure to smell next to the floor because some gas is heavier than air and will settle on the floor.
- What To Do If You Smell Gas:
- Do not try to light the appliance.
 - Do not touch any electrical switch. Do not use any phone in your building.
 - Immediately call your gas supplier from a neighbour's phone. Follow the gas suppliers instructions.
- If you cannot reach your gas supplier, call the Fire Department.
- C. Do not tamper with, or attempt to repair the gas control valve. If the system does not operate properly, call your service technician or gas supplier. Force or attempted repair may result in a fire or explosion.
- D. Do not use this appliance if any part has been under water. Immediately call a qualified service technician to inspect the appliance and to replace any part of the control system, and any gas control which has been under water.

LIGHTING INSTRUCTIONS:

1. STOP! Read the safety information above on this label.
2. Make sure the wall switch is in the "OFF" position. Locate the gas control behind the lower trim.
3. Wait 5 minutes to clear out any gas. If you smell gas, STOP! Follow "B" in the safety information above on this label. If you don't smell gas, go to step 4.
4. Find the indicator light on the control module, located under the fireplace near the gas control valve. If the indicator light is flashing slowly, the system is ready for lighting.
5. Turn on the wall switch. You will hear a 'ticking' sound as the system attempts to light the fireplace. If successful, the main burner will ignite, and the indicator light will flash quickly.
If not successful, the system will automatically close the gas valve to stop the flow of gas. The indicator light will double flash, and the system will lock out for five minutes.

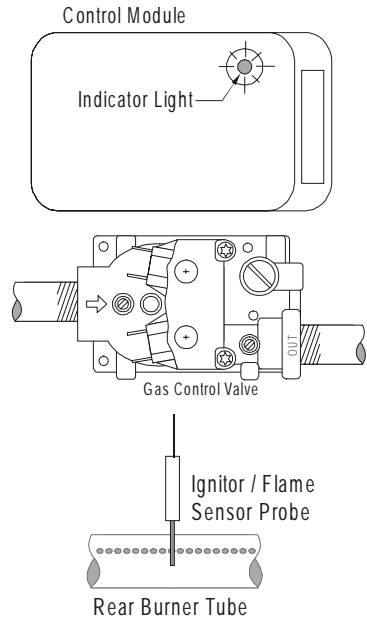

TO TURN OFF GAS TO APPLIANCE:

1. Turn off the wall switch.
2. If service is to be performed, turn off all electric power to the appliance.