

MODELS: Prodigy PC8**
STYLE: Single Sided

DESCRIPTION	FEATURES
The Prodigy adds tranquility and warmth to your home. The linear burner produces a relaxing ribbon-like flame. Your desired media can completely cover the bed of the firebox, enhancing the ambience even when the fireplace is not in use. Clean contemporary lines and frameless double glass design deliver breathtaking aesthetics. Finishing materials can be brought down to the edge of the glass creating a stunning focal point without interruption.	<ul style="list-style-type: none"> • COOL-Pack system allows for all glass barriers, no screens required • Zero clearance • Multi-color LED lighting • Up to 15,000 BTU/HR per linear foot • Customizable media options • Electronic ignition-no standing pilot • Compatible with home automation systems


INTAKE	
Intake Size	2x10"
Intake location	Top
Damper	Optional, tied into control system

EXHAUST	
Power vent	Montigo roof mount, wall mount, or inline
Flue	12"
Damper	Optional, tied into control system

GLASS	
Viewing area	96" wide x 12, 20, 30, 36, 60" high
Type	Tempered
Temperature	COOL-Pack < 125°F

GAS	
Input	112,000 BTU/hr ½" NPT gas line connection
Minimum Inlet pressure	5.5" w.c Natural Gas OR 11" w.c Propane
Control valves	SIT Sigma 845 or Honeywell VK81
Burner Style	Concealed ribbon or hi-low burner

MISCELLANEOUS	
Electrical	208 VAC Single Phase 15 Amp
Testing standards	ANSI Z21.50/ CSA 2.22-2014 and ANSI Z21.97/ CSA 2.41-2014
Construction	Black satin painted galvanized steel
Media options	Firestones, fireglass, speckled stones, driftwood logset, reflective glass panels

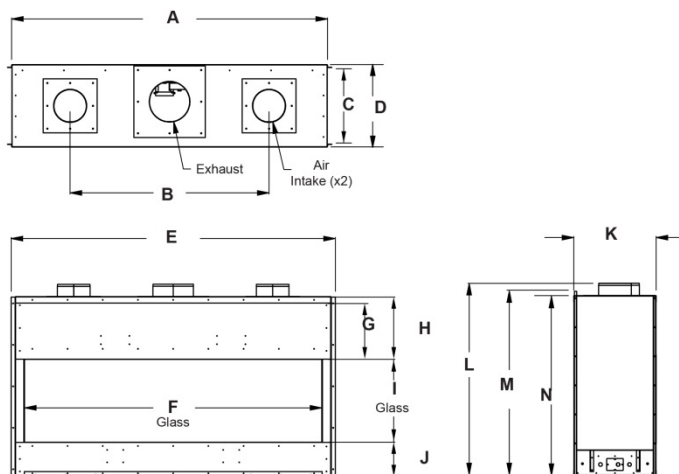

MODEL SIZE	3'	4'	5'	6'	7'	8'
Air Intake	2X6"			2X8"		2X10"
Exhaust	8"			10"		12"
A	40¼"	52¼"	64¼"	76¼"	88¼"	100¼"
B	24"	32"	40"	48"	56"	60"
C				18½"		
D				197⁄8"		
E	42¼"	54¼"	66¼"	78¼"	90¼"	102¼"
F	36"	48"	60"	72"	84"	96"
G				15½"		
H				167⁄8"		
I				12", 20", 30", 36", 60"		
J				8½"		
K				197⁄8"		
L				26 3⁄16" + Glass Height		
M				24 ¼" + Glass Height		
N				23 ¼" + Glass Height		